


- Variable pattern ○∞8
- Rectangular large dual membrane capsule
- Build in pop protection
- - 12 dB pre-attenuation
- Shock absorbing rubber fitted capsule

Frequency response ( see graph )	20 - 20 000 Hz
Polar pattern	Cardioid, omni and figure-of-eight
Max. SPL ( 1 % THD at 1 kHz)	132/144 dB
Sensitivity at 1kHz	21,5 mV / Pa ± 1 dB
A-weighted noise level ( IEC 179-A)	13 dB
Power supply	48 V ± 4 V phantom
Current consumption	4,2 mA
Output impedance	< 200 Ω
Minimum load impedance	1 kΩ
Connection	3-pin XLR
	pin 1: earth ( Shield )
	pin 2: plus ( Hot )
	pin 3: minus ( Cold )
Net weight	230 g
Length	145 mm
Diameter	27 mm




### Frequency response (at 1m distance)

The frequency response may vary within ± 2,5 dB of the published graph.  
Before delivery, each microphone is measured and accompanied with it's own graph.

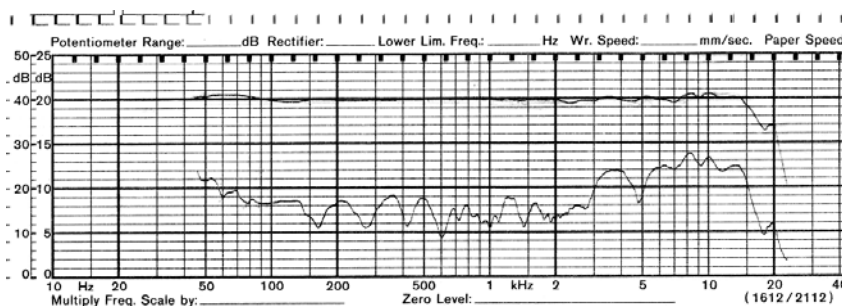

### Polar diagram

Cardioid

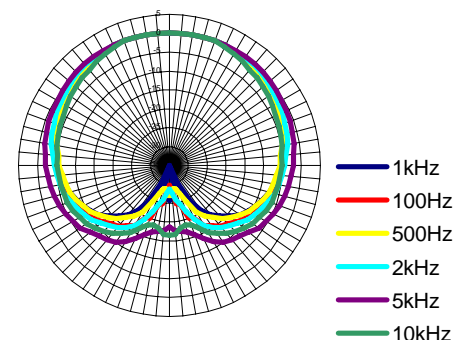

### Milab Microphones AB

Mailing address  
P. O. Box 1342  
S-251 13 HELSINGBORG  
SWEDEN

Office address  
Norra Strandgatan 4

Phone  
+46 42 381620

Fax  
+46 42 136350

E-mail  
milab@milabmic.com  
Internet  
www.milabmic.com